



Every single gram,
caring for the life with dedication.



Contact Us

🌐 www.celixhpmc.com 📩 sales@celixcellulose.com 📞 +8618330106777
📍 No.1806, Zhongheng Building, Chang'an District, Shijiazhuang, Hebei Province
🏢 XiuCun West, Jinzhou Economic Development Zone, Shijiazhuang City, Hebei Province, China

**Hebei Celix
Cellulose Co., Ltd**

**HPMC
HEMC
HEC
RDP**

CONTENTS

COMPANY PROFILE	03
CELIX FOOTPRINT	05
CELIX SUPPLY CHAIN MANAGEMENT	07
HPMC	13
SURFACE TREATED HPMC	14
HEMC	15
HEC	16
VAE RDP	17
APPLIACIONS	18
PACKAGE & SHIPPING	29
OUR QUALIFICATION	31
OUR FUTURE	33

COMPANY PROFILE

Hebei Celix Cellulose Co., Ltd., an integrated cellulose manufacturer with in-house R&D, factory, and global sales, advocates the technology drives the development of green materials.

Celix Cellulose is a trusted Chinese manufacturer of advanced cellulose ethers and green construction additives.

Our products include **HPMC, HEC, MHEC, RDP**, gypsum retarder, starch ether, pp fibers, polyvinyl alcohol powder, polycarboxylate superplasticizer, defoamers, and calcium formate, widely applied in construction, coatings, and daily chemicals.

We will continuously empower global formulators with sustainable cellulose technology.



Mission

We focus on the innovation of green cellulose materials, empower customers in multiple fields such as construction, health and care, and food, and provide the world with a safer, more environmentally friendly, and high-performance product experience.

Vision

Harnessing cellulose technology to enhance everyday life – and building a trusted global brand for sustainable material solutions.

5C Value

Credibility

We believe consistent quality and integrity are non-negotiable. They form the foundation of every trust-based relationship we build globally.

Consistency

Stable supply, predictable outcomes—that's the Celix standard.

Creativity


We create space for every idea to be heard, tested, and celebrated.

Care

Growth matters, but not without care—for employees, communities, and ecosystems.

Collaboration

We believe progress is built on shared vision and mutual respect.



Our Expertise Since 2007

Application Oriented

As an experienced cellulose manufacturer, Celix designs the products with a deep understanding of our end user needs across **construction, food, health and care**.

Our solutions concentrate on diverse specific applications, providing optimal viscosity, workability, and bonding strength. Those will deliver the advanced cellulose technology where it matters most.



Global-grade Solutions

Celix offers globally benchmarked cellulose ether products, tested to meet **ISO, ASTM, and EU standards**.

With a marketing experience across **30+ countries**, Celix cellulose formulations helped the local industrial producers to upgrade their material systems and technology continuously.

Trusted Chinese Manufacturer

Backed by the modern facilities and automated production lines, Celix could promise the consistent quality, traceability, and cost-efficiency.


As a trusted cellulose manufacturer in China, the 187 Celix's members integrate R&D, production, and QC to support the yearly **30000 tons** of production capacity with confidence.

Sustainable Cellulose Technology

The HPMC and related products are plant-derived and biodegradable, aligning with global green mandates. Celix's cellulose technology supports a sustainable development by reducing VOC emissions, enhancing the material lifespan, and contributing to eco-friendly formulations.

Green Formulation

Whether it's energy-efficient mortar systems or low-carbon building materials, Celix enables formulators to lead the green transition. Our full range of cellulose based additives ensures you can create high-performance products with lower environmental impact without compromising on results.

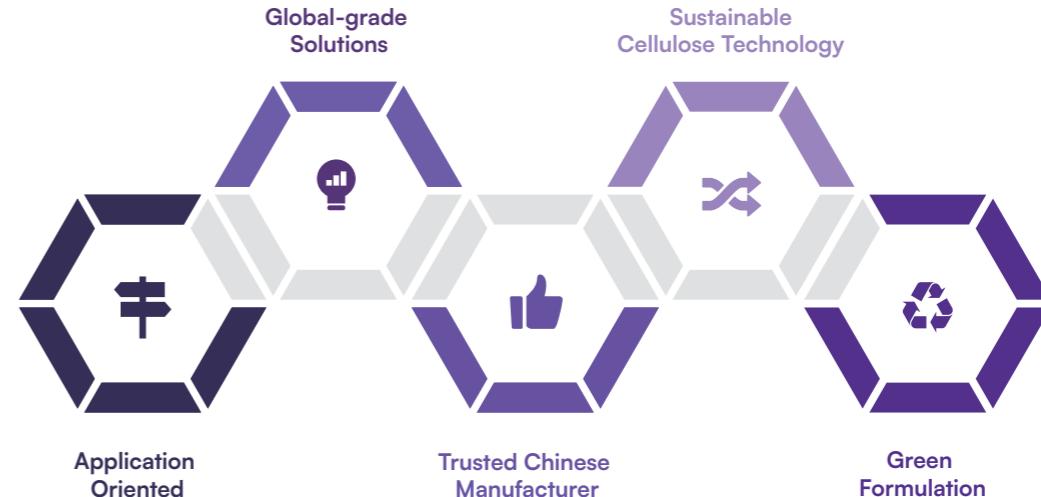



CELIX FOOTPRINT |

2007

Our founder Mr. Gu established the factory in Jinzhou, Hebei.



2015

Completed the sales distributor net of China, included the branches of Hebei, Xinjiang, Anhui and Fuzhou province.




2010



The yearly capacity of HPMC reach to 10,000 tons.

2019

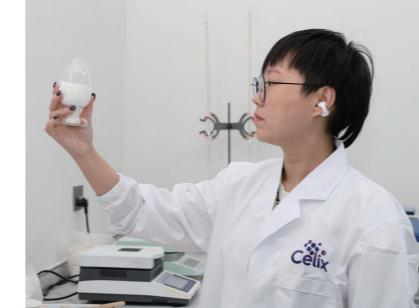

Be awarded by the Jingzhou Industrial committee, our application RD Lab of Jinzhou Factory.

2023

Launched the environmental instrument of manufacture. The yearly capacity of HPMC reached to 30,000 tons.



It was awarded as a National High-tech Enterprise.

2025

Registered CELIX for the own cellulose brand in our global sales.



Our factory was awarded as a science and technology based small and medium sized enterprise in Hebei Province.

CELIX SUPPLY CHAIN MANAGEMENT

Celix maintains a mature quality inspection process system to ensure consistent product excellence. The process begins with strict raw materials QC to verify the quality of incoming ingredients.

This is followed by thorough finish cellulose ether QC, where all finished products are tested for performance and compliance. Finally, a loading check is performed before shipment to confirm that all standards are met.

Supported by two owned R&D labs, this comprehensive quality system underscores Celix's commitment to delivering reliable and innovative cellulose-based solutions.



Reaction Kettle



Refined Cotton



Crushing & sieving



Propylene Oxide & Methyl Chloride



Liquid Alkali




Tile Adhesive Pull-off Tester



PRODUCTION PROCESS

1.Before production, refined cotton needs to be crushed into powder.

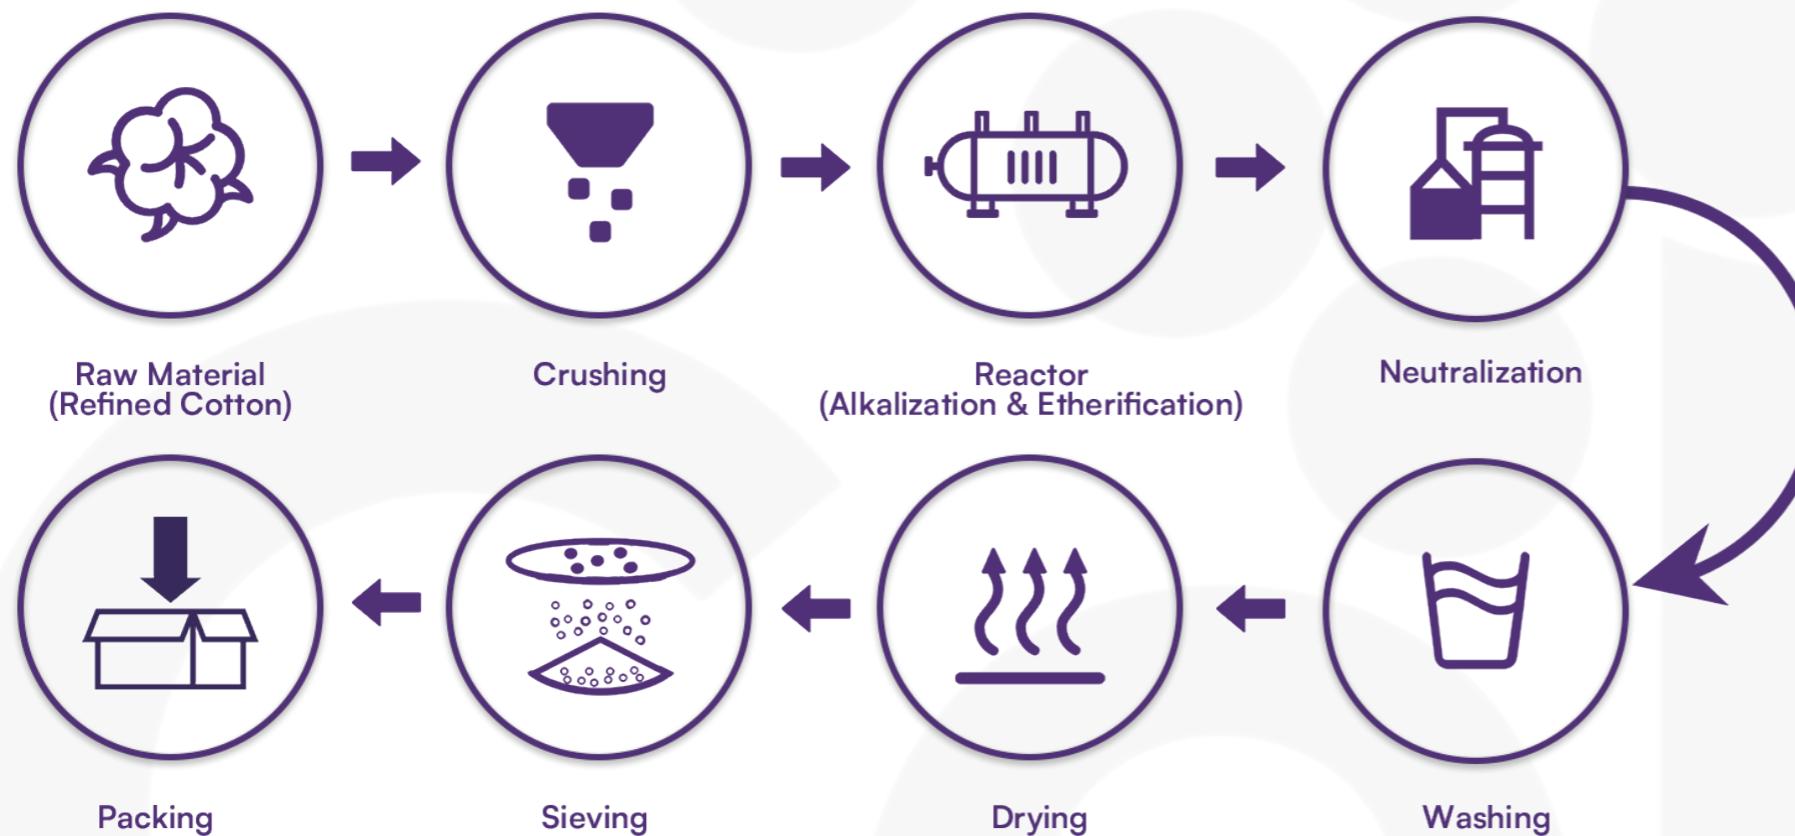

6.In the finished product workshop, HPMC is carefully packaged by our team to meet each customer's individual specifications and quality standards.

2.Put the refined cotton powder and liquid alkali into the reaction kettle, then get an alkalization reaction. It will release the alkalized cellulose.

3.Put propylene oxide, methyl chloride into the reaction kettle and mix together with the previous alkalized cellulose. The etherification reaction will carrys out. It needs to be carried out under high temperature (about 70-90°C) and high pressure for several hours. Then the initial hpmc could be produced.

4.After the etherification reaction process, salts and unreacted alkali may remain in the reactor with the pure HPMC. These impurities must be removed through washing, neutralization and recovering process. The washing could help to remove the salts. The neutralization can adjust the pH value of HPMC to be neutral. By recovering process, the excess propylene oxide and methyl chloride are reused by recycling.

5. After washing, the HPMC is still wet and must be dried until its moisture content drops below 5%. Once dried, it forms solid blocks, which are then ground and sieved to produce the final fine HPMC powder.

General Properties



lubrication

Improves workability and processing of cement and ceramic base extrusions through its lubrication.



Suspension

Prevents settling of particles and ensures uniform stability in mixtures.



Viscosity

Enhances liquid thickness and stabilizes suspensions and emulsions.



Water retention

Reduces water loss of its formulations when applied to water absorbing surfaces such as a wallboard, etc.



Solubility

Readily dissolves in cold water to form viscous colloidal solutions with excellent clarity.



Enzyme resistance

Provides excellent viscosity stability during long-term storage due to its resistance against fungi and bacterial attacks.



Film formation

Forms clear, tough and flexible film, which provides excellent barrier properties against oils and greases.



Air entrainment

Entrains micro air voids into the matrix which improves light handling and mortar yield.



Opacifying Effect

Increases the hiding power and creates a consistent milky appearance.



Thickening effect

Increases viscosity of liquids and enhances the stability of suspension and emulsion systems.



Particle Size

Provides rapid dissolution with minimal dust for easy handling.



Dispersibility

Prevents particle agglomeration through steric stabilization ensuring uniform dispersion.

HPMC

HYDROXYPROPYL METHYL CELLULOSE




Celix HPMC produced by Celix has good thickening, water retention, suspension, emulsification, adsorption and stability. A variety of models can meet various application needs of different customers.

HPMC Model: PM-4H,PM-30U,PM-55U, PM-65U,PM-75U

Product Specifications

Specification	Index
Exterior	White or light yellowish white
Methoxyl, %	19-24
Hydroxypropyl, %	7.5-12.0
Gel temperature, °C	60-70
Ash content, %	≤5
Water content, %	≤5
pH value	6-8
Viscosity(2%, 20°C, Mpa.s)	350-75000
Granularity	98% passed the 80 mesh
Density	370-390g/l ³

Applications

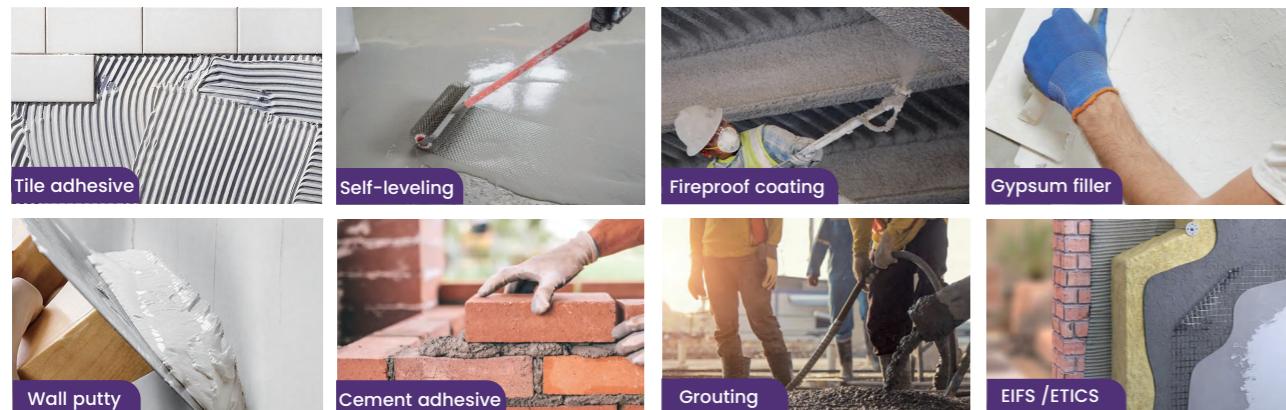

SURFACE TREATED HPMC

MODIFIED HYDROXYPROPYL METHYL CELLULOSE



The surface-treated HPMC produced by Celix has good thickening, dispersibility, stability and high transparency, and is widely used in the production of detergents, fireproof, coatings and wallpaper adhesives.

Surface Treated HPMC Model: PM-Pro-75US

Applications

Laundry detergent
Dish soap
Handwashing fluid
Wallpaper glue
Glutinous rice glue
Liquid fire retardant coating



Hand sanitizer



Wall putty



Laundry liquid



Glutinous rice glue



Wallpaper glue



Laundry detergent

HEMC

HYDROXYETHYL METHYL CELLULOSE



Celix HEMC is a cellulose ether that provides higher gel temperature and better heat resistance than HPMC due to its more hydrophilic structure.

HEMC Model: EM-4H,EM-30U,EM-55U, EM-65U,EM-75U

Product Specifications

Specification	Index
Exterior	White or light yellow powder
Methoxyl,%	18.0-24.0
Hydroxypropyl,%	8.0-16.0
pH value	5.8-8.5
Moisture,%	≤6
Ash, %	≤3
Graininess	100 mesh 98.5% pass, 80 mesh 100% pass
Viscosity(2%, 20°C, Mpa.s)	400-80000



Applications

Masonry mortar	Paint
Plastering mortar	Caulk plaster
Tile adhesive	Gypsum surface mortar
Cement based putty	Gypsum base mortar
EIFS & ETICS	Machine sprayed plaster
Anti-crack mortar	Adhesive mortar

HEC

HYDROXYMETHYL CELLULOSE



Celix HEC is a non-ionic, highly hydrophilic cellulose ether. It offers excellent thickening, water retention, and suspension properties without gelling upon heating.

HEC Model: EC-30, EC-90

Product Specifications

Specification	Index
Exterior	White or light yellowish white
Methoxyl,%	19-24
Hydroxypropyl,%	7.5-12.0
Gel temperature,"C	60-70
Ash content,%	≤5

Applications

Fire retardant coating	Interior and exterior wall latex paint
Real stone paint	Texture paint
Oil drilling	



Oil drilling



Paint

VAE RDP

REDISPERISIBLE POLYMER POWDER




RDP is a kind of powder binder made by spray drying special emulsion (high polymer). Celix RDP is green environmental protection building energy saving, high quality and multi-purpose powder building materials.

RDP Model: RDP1-030,RDP-1060,RDP-1090

Product Specifications

Specification	Index
Exterior	White free flowing powder
Protective colloid	PVA
Solid content, %	97-99
Ash content, %	10±2
Bulk density, g/l3	300-500
Particle size, μm	≥ 80
Minimum film forming temperature, °C	0-5

► Applications

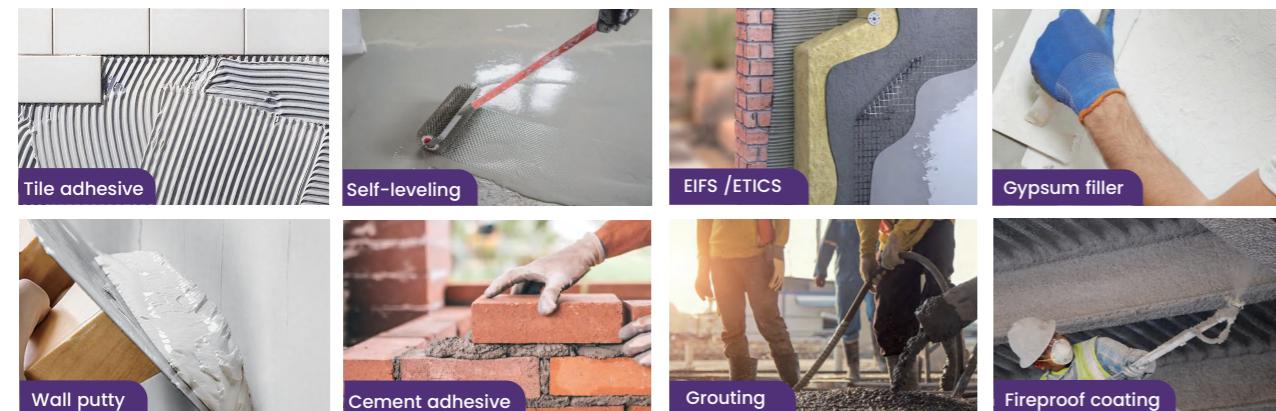

Applications

Tile Adhesives

To provide excellent thickening efficiency, long open time and adhesion power.

EIFS / ETICS

To provide excellent workability and long working time.

Plasters & Renders

To provide excellent workability and water retention.

Skim Coat

To provide water retention and workability during processing



Tile Adhesives

Effects of raw materials

Celix HPMC promises the high performance and excellent working efficiencies for attachment of tiles to various substrates. Being slip resistance and having better open time is the key to better adhesive requirements. These improvements can only be gained through HPMC

Raw material	Cement CEM I 42.5R	Quartz sand	Hydrated lime	Redispersible powder	CELIX HPMC
Content (wt%)	30 ~ 50	40 ~ 70	0 ~ 5	0 ~ 5	0.20 ~ 0.60
Adhesion strength	●		●	●	●
Viscosity	●		●		●
Flexibility				●	
Workability		●	●	●	●
Slip resistance					●
Water retention					●
Setting time	●			●	●
Open time					●
Correction time					●


Grade	Model	Viscosity (mPa.s, 2% sol.)	Application	Properties
Pure Grade	PM-55U	45000-60000	Normal & Economical	Excellent slip resistance & Good open time
Pure Grade	PM-65U	55000-65000	Normal & Economical	Excellent workability & Good adhesion strength
Pure Grade	PM-75U	65000-75000	Normal & Economical	Excellent adhesion strength & Good open time
Modified Grade	PM-Pro-AS	45000-75000	High Performance	Anti Slipping
Modified Grade	PM-Pro-AST	45000-75000	High Performance	Anti Slipping & Good Open Time
Modified Grade	PM-Pro-AS2T	45000-75000	High Performance	Excellent Adhesion Strength & Excellent Open Time
Modified Grade	PM-Pro-AS2T+	45000-75000	High Performance	Excellent Adhesion Strength & Superior overall performance

EIFS ETICS

EIFS with Celix HPMC promises even higher performances and excellent working efficiencies on job sites.

Celix HPMC leads to high sag resistance and long embedding time, which are the required key properties of EIFS.

Base Wall (Masonry/Plaster)

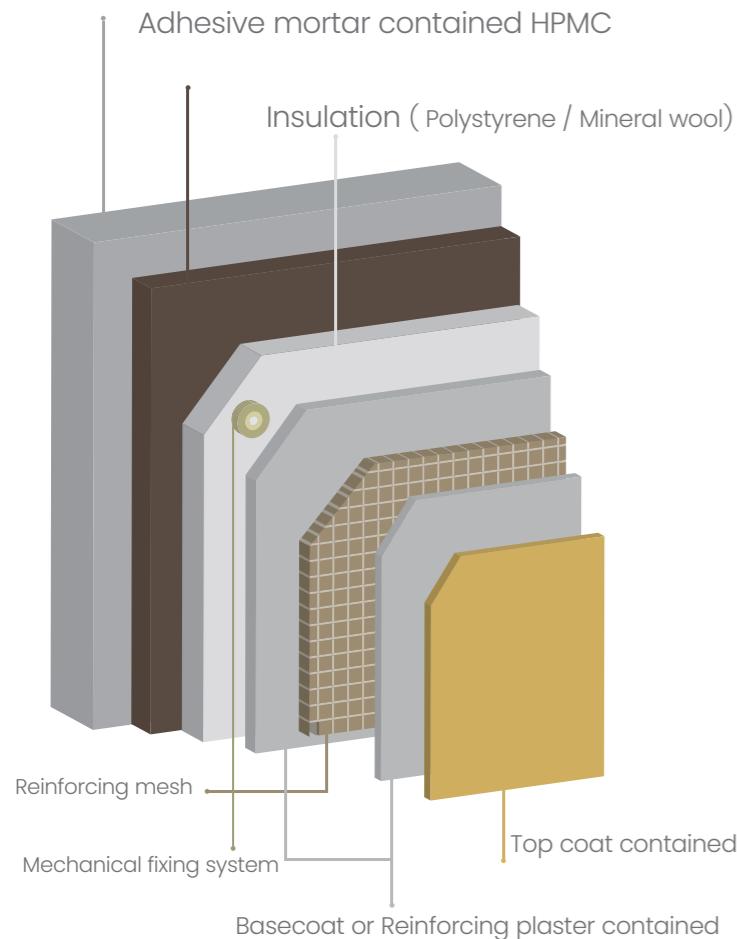

Effects of raw materials

Raw material	Cement CEM I 42.5R	Quartz sand	Hydrated lime	Redispersible powder	Hydrophobic agent	Starch ether	CELIX HPMC
Content (wt%)	20 ~ 30	60 ~ 70	0 ~ 5	1.5 ~ 4	0.1 ~ 0.3	0.01 ~ 0.02	0.15 ~ 0.4
Adhesion strength	●		●	●			●
Open time						●	●
Water retention							●
Consistency	●		●			●	●
Crack	●		●				●
Easy trowelling		●	●	●		●	●
Sag resistance						●	●
Stickiness						●	●
Setting time	●			●			●
Waterproof					●		

EIFS (Exterior Insulation Finishing System)

ETICS (External Thermal Insulation Composite Systems)

Grade	Model	Viscosity (mPa.s, 2% sol.)	Application	Properties
Pure Grade	PM-55U	45000-60000	EIFS/ETICS	Excellent slip resistance & Good open time
Pure Grade	PM-65U	55000-65000	EIFS/ETICS	Excellent workability & Good adhesion strength
Pure Grade	PM-75U	65000-75000	EIFS/ETICS	Excellent adhesion strength & Good open time
Modified Grade	PM-Pro-E20U	14000-22000	EIFS/ETICS	Excellent workability & Good sag resistance
Modified Grade	PM-Pro-E30U	25000-35000	EIFS/ETICS	Excellent slip resistance & Good open time
Modified Grade	PM-Pro-E45U	40000-50000	EIFS/ETICS	Excellent open time & Less stickiness
Modified Grade	EM-Pro-E40U	35000-45000	EIFS/ETICS	Good heat resistance, excellent workability
Modified Grade	EM-Pro-E55U	45000-60000	EIFS/ETICS	Excellent open time, long open time

Cement based Render

Effects of raw materials

Cement based render with Celix HPMC ensures superior quality and high efficiencies when applied to job sites.

Have a look at the information on the below to see how you can customize your products to gain a competitive advantage.

Raw material	Cement CEM I 42.5R	Limestone sand	Hydrated lime	Air entraining agent	Hydrophobic agent	CELIX HPMC
Content (wt%)	20 ~ 30	60 ~ 70	2 ~ 5	0.015 ~ 0.03	0.1 ~ 0.2	0.08 ~ 0.15
Tensile strength	●		●			●
Crack resistance	●	●	●			●
Workability		●	●	●		●
Sag resistance			●			●
Water retention			●			●
Setting time	●			●		●
Working life						●
Waterproof					●	

Grade	Model	Viscosity (mPa.s, 2% sol.)	Application	Properties
Pure Grade	PM-55U	45000-60000	Cement based Render	Excellent workability & Less retardation of cement hydration
Pure Grade	PM-65U	55000-65000	Cement based Render	Excellent workability & Good sag resistance
Pure Grade	PM-75U	65000-75000	Cement based Render	Excellent sagging resistance & Easy workability

Gypsum based Plasters

Gypsum based plaster displays different properties based on the type of formulations and resource origins.

That's why special grades of Celix HPMC have been developed to meet the specific requirements of our customers. With our well-equipped, specialized gypsum application laboratories, our broad product offerings, and our experienced team of application experts, we can always assist you in finding the right solutions in order to meet your requirements.

Effects of raw materials

Raw material	Gypsum (Hemi hydrate)	Hydrated lime	Limestone flour	Limestone sand or Silica sand	Perlite	Retarder	Air entrainment agent	Starch ether	CELIX HPMC
Content (wt%)									
Gypsum Machine Plaster	40~60	1~5	5~30	30~50	0~3	0.02~0.2	0.01~0.03	0.01~0.1	0.15~0.3
Gypsum Machine Plaster	74~98	1.5~5	0~5	5~10	0.3~3	0.02~0.2	0.01~0.03	0.01~0.1	0.15~0.3
Gypsum Hand Plaster	74~95	0.5~5	-	5~25	0~3	0.02~0.2	0.01~0.03	0.01~0.05	0.1~0.2
Gypsum Finishing Plaster	70~100	0~2	0~30	-	-	0.02~0.2	0.01~0.02	0~0.1	0.3~0.7
Strength	●	●							
Workability		●			●	●	●	●	●
Sag resistance								●	●
Water retention	●								●
Consistency	●	●	●	●				●	●
Easy trowelling		●				●	●	●	●
Stickiness							●	●	●
Setting time	●				●				●
Working life					●				●

Grade	Model	Viscosity (mPa.s, 2% sol.)	Application	Properties
Modified Grade	PM-Pro-G1	35000-43000	Hand	High thickening efficiency & Good sag resistance
Modified Grade	PM-Pro-G2	25000-50000	Machine	Easy workability & excellent sag resistance
Modified Grade	PM-Pro-G3	27000-37000	Finishing	High water retention & Good workability
Modified Grade	PM-Pro-G4	25000-35000	Joint Filler / Finishing	Fast dispersing effect & no lump & Easy workability
Modified Grade	EM-Pro-GP40U	35000-45000	Hand	High thickening efficiency & Good sag resistance
Modified Grade	EM-Pro-GP55U	45000-60000	Hand	High thickening efficiency & Good sag resistance

Skimcoat

Skimcoat with Celix HPMC offers smooth wall surface. It ensures easy workability, long pot life, excellent water retention and more.

Effects of raw materials



Grade	Model	Viscosity (mPa.s, 2% sol.)	Application	Properties
Pure Grade	PM-55U	45000-60000	Skim Coat	Excellent workability and Extended pot life
Pure Grade	PM-65U	55000-65000	Skim Coat	Excellent workability and Extended pot life
Pure Grade	PM-75U	65000-75000	Skim Coat	Extended open time and Good workability
Modified Grade	PM-Pro-WP	45000-55000	Wall Putty	Extended pot life, less lump formation, and Smooth surface
Modified Grade	PM-Pro-SWP	46000-56000	Wall Putty	Extended pot life, less lump formation, and Smooth surface
Modified Grade	EM-Pro-WP40U	35000-45000	Wall Putty	Good heat resistance, excellent slip resistance
Modified Grade	EM-Pro-WP55U	45000-60000	Wall Putty	Excellent open time, excellent slip resistance

PACKAGE & SHIPPING

Packaging Storage

HPMC is a paper-plastic composite package with a net weight of 25 kg. For long-term storage, it should be fireproof and rainproof, and avoid contact with humid environments

Safety information

While CELIX® is classified as a non-hazardous material, the following should be taken notice of in order to avoid unexpected accidents when handling:

Storage : Dust of CELIX® is capable of exploding. To avoid explosion due to dust, store aware from heats, sparks and fires, and do not expose it directly to high temperatures.

Handling : Solutions of CELIX® are very slippery. To avoid any accidents, sweep the spilled powder and keep dry.

Health : Use appropriate procedures to avoid direct contact such as the skin or eyes and prevent any inhalation of the product.

Additional information : For further information on safety, refer to the Material Safety Data Sheet (MSDS) and/or contact Celix directly with our representatives.



HONORARY QUALIFICATIONS

Our quality commitment is internationally certified. Celix maintains ISO 9001 for quality management and ISO 14001 for environmental management, ensuring reliable and sustainable operations.

All products comply with ASTM standards and are verified by SGS for performance and safety.

These certifications demonstrate our dedication to excellence and continuous improvement. At Celix, we transform standards into exceptional value for global customers. Trust our certified quality.



Environmental Management System Certificate



Occupational Health And Safety Management System Certificate



Quality Management System Certificate



Aaa-Level Quality Service And Integrity Unit



Aaa-Level Credit Enterprise



SGS Certification



OUR FUTURE

The hpmc and related products are plant-derived and biodegradable, aligning with global green mandates.

Celix's cellulose technology supports a sustainable development by reducing voc emissions,

enhancing the material lifespan, and contributing to ecofriendly formulations.

Whether it's energy-efficient mortar systems or low-carbon building materials, celix enables formulators to lead the green transition.

Our full range of cellulose-based additives ensures you can create high-performance products with lower environmental impact without compromising on results.



CELIX Global Agent Development Policy

As a professional cellulose technology manufacturer with 18 years of expertise, we believe collaboration is the key to creating value for local markets and customers.

Through our Global Sites Policy, Celix aims to establish long-term agent relationships in overseas markets, offering partners not only high-quality HPMC, HEMC, HEC, RDP, and other cellulose additives, but also comprehensive technical and commercial support. We provide training, laboratory testing, and engineering services to help agents address customer needs with confidence.

In addition, Celix offers joint marketing initiatives, resource sharing, and co-branding opportunities to ensure agents have the tools necessary to grow their businesses sustainably. Our strategy focuses on mutual growth—where Celix delivers consistent products and innovation, while our partners strengthen local distribution, customer service, and application expertise. Together, we build global access to cellulose technology that helps industries construct better, cleaner, and more efficient futures.